



OnyxBlock

STOP LOSSES BEFORE THEY START

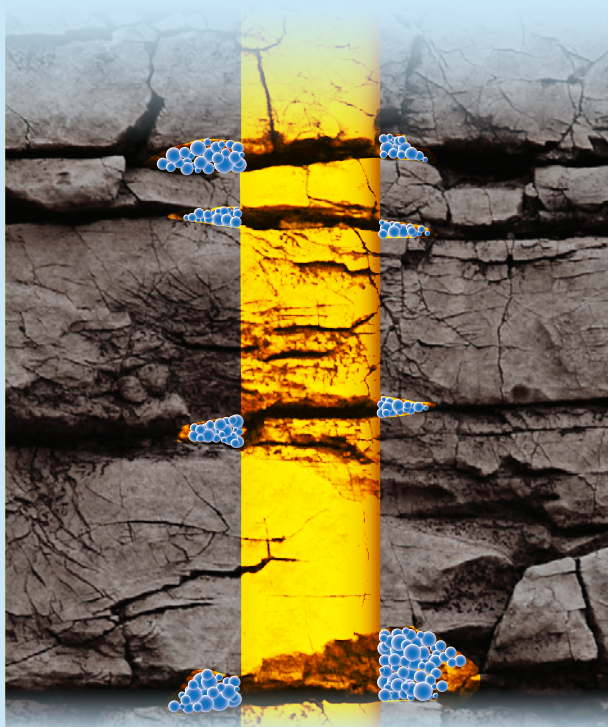

WITH ONYXBLOCK

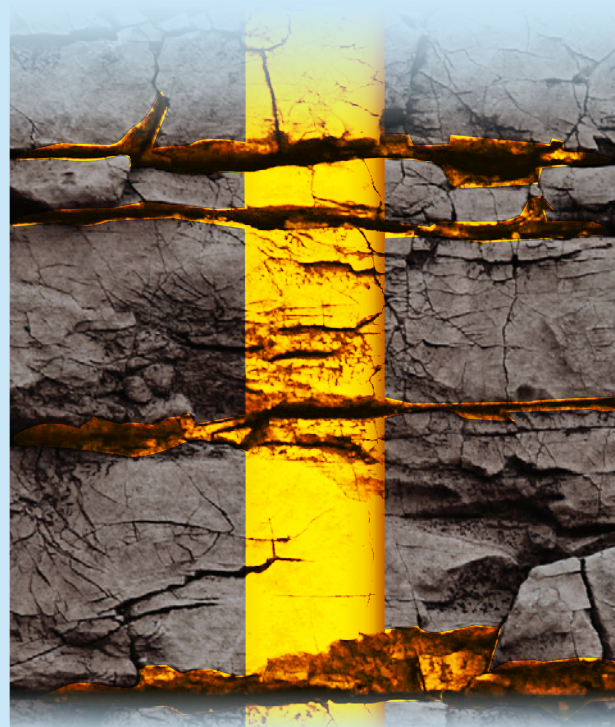


WITHOUT

PRIMARY FUNCTIONS

- Minimize fracture propagation
- Decrease losses by 22-25%
- Increased ROP on horizontal Water Base wells by 50%
- 1 sx blend for ease of use
- Environmentally suitable for Water Base or Oil Based Systems


ONYXBLOCK LCM BLEND

Uses 5 different Loss Prevention products in specific quantities to establish the optimal blend. LPM is added continuously throughout to plug fractures as they are drilled.

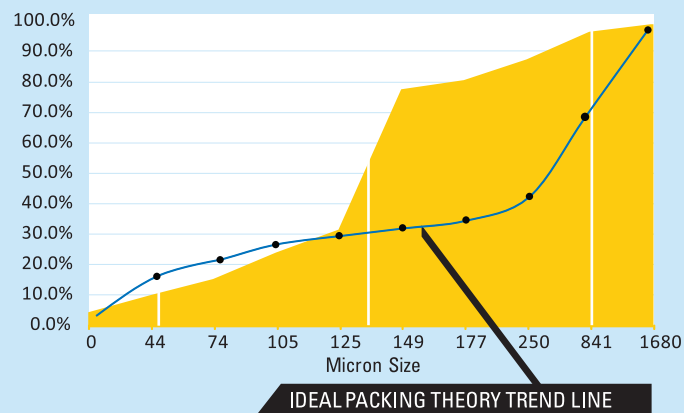

PROOF

DECREASES LOSSES.

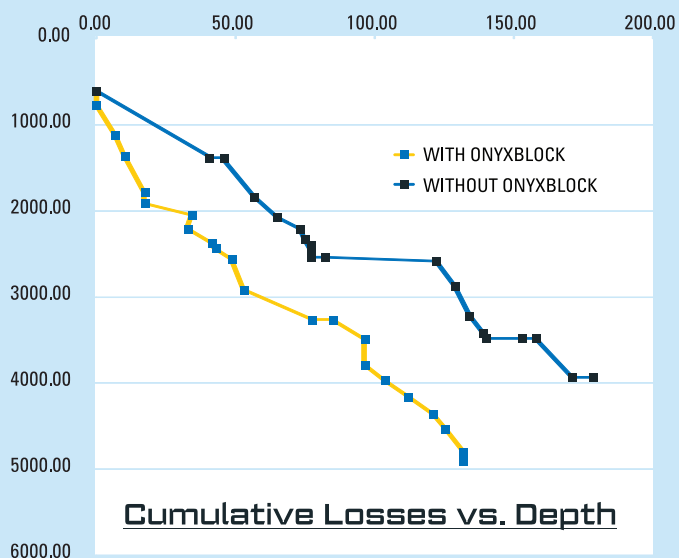

ROP INCREASE

Unable to slide effectively in Intermediate hole. ROP around 5 m/hr.

Began mixing OnyxBlock to help decrease Coefficient of Friction.

ROP increased immediately to 11.2 M/hr.

